


Part Number: 8723

Audio, Control & Instrument, #22-2pr, PO, Individ. Foil, PVC Jkt, CM

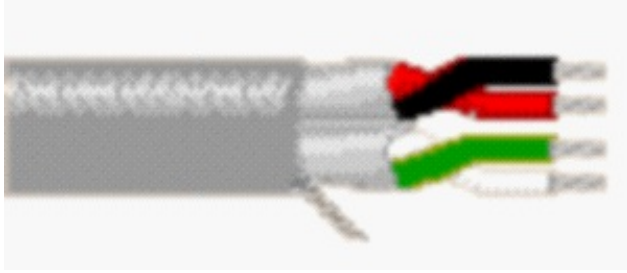

Product Description

Audio, Control & Instrument Cable, 22 AWG stranded (7x30) tinned copper conductors, polypropylene insulation, twisted pairs, individually Beldfoil® shielded (100% coverage), 24 AWG stranded tinned copper drain wire, PVC jacket.

Technical Specifications

Construction and Dimensions

Conductor:

| AWG | Stranding | Material | No. of Pairs |
|------------------------------------|-----------|--------------------|--------------|
| 22 | 7x30 | TC - Tinned Copper | 2 |
| Total Number of Conductors: | | | 4 |

Insulation:

| Material | Nominal Wall Thickness |
|--------------------|------------------------|
| PP - Polypropylene | 0.009 in |

Color Chart 1:

| Number | Color |
|--------|---------------|
| 1 | Red & Black |
| 2 | Green & White |

Innershield:

| Type | Material | Material Trade Name | Coverage [%] | Drainwire Material | Drainwire AWG | Drainwire Construction n x D |
|------|------------------------------|---------------------|--------------|--------------------|---------------|------------------------------|
| Tape | Aluminum Foil-Polyester Tape | Beldfoil® (Z-Fold®) | 100 % | TC - Tinned Copper | 24 | 7x32 mm |

Outershield 1:

| Material |
|------------|
| Unshielded |

Outerjacket 1:

| Material | Nominal Diameter | Nominal Wall Thickness |
|--------------------------|------------------|------------------------|
| PVC - Polyvinyl Chloride | 0.16 in | 0.02 in |

Electrical Characteristics

Conductor DCR:

| Individual Pair Nominal Shield DCR | Nominal Conductor DCR |
|------------------------------------|-----------------------|
| 15 Ohm/1000ft | 14.7 Ohm/1000ft |

Capacitance:

| Nom. Capacitance Conductor to Conductor | Nom. Capacitance Conductor to Other Conductor to Shield |
|---|---|
| 33 pF/ft | 62 pF/ft |

Impedance:

| Nominal Characteristic Impedance |
|----------------------------------|
| 52 Ohm |

High Frequency (Nominal/Typical):

| Nom. Insertion Loss |
|---------------------|
| 10 dB/100m |

Delay:

| Nominal Velocity of Propagation (VP) [%] |
|--|
| 66 % |

Current:

| Max. Recommended Current [A] |
|---------------------------------|
| 2.3 Amps per conductor @ 25°C A |

Inductance:

| Nominal Inductance |
|--------------------|
| 0.17 μ H/ft |

Voltage:

| UL Voltage Rating |
|-------------------|
| 300V RMS V |

Use

| | |
|----------------------------------|--------|
| Max Recommended Pulling Tension: | 42 lbs |
|----------------------------------|--------|

Safety

| | |
|------------------|-------------------|
| UL Flammability: | UL1685 UL Loading |
|------------------|-------------------|

Temperature Range

| | |
|-----------------------|-------------------|
| Operating Temp Range: | -20°C To +75°C °C |
|-----------------------|-------------------|

| | |
|-----------------|---------|
| UL Temp Rating: | 60°C °C |
|-----------------|---------|

Mechanical Characteristics

| | |
|-----------------------------|---------|
| Min Bend Radius/Minor Axis: | 1.75 in |
|-----------------------------|---------|

Part Number

| | |
|---------------|----|
| Plenum (Y/N): | No |
|---------------|----|

| | |
|----------------|---------------------|
| Plenum Number: | 82723, 87723, 88723 |
|----------------|---------------------|

Standards

| | |
|-----------------------------------|-----|
| CA Prop 65 (CJ for Wire & Cable): | Yes |
|-----------------------------------|-----|

| | |
|--------------------------|----|
| CEC/C(UL) Specification: | CM |
|--------------------------|----|

| | |
|-----------------------------|-----|
| MII Order #39 (China RoHS): | Yes |
|-----------------------------|-----|

| | |
|-------------------------|----|
| NEC/(UL) Specification: | CM |
|-------------------------|----|

| | |
|--------------------------|-------------------------------|
| EU Directive Compliance: | EU Directive 2003/11/EC (BFR) |
|--------------------------|-------------------------------|

| | |
|-------------|-----|
| EU CE Mark: | Yes |
|-------------|-----|

Product Variants

| Part Number | Color | Put-Up Type | Length |
|---------------|--------|-------------|----------|
| 8723 | | | |
| 8723 | CHROME | Reel | 3048 m |
| 8723 06010000 | CHROME | Reel | 10000 ft |
| 8723 | | | |
| 8723 06010001 | CHROME | Reel | 10000 ft |
| 8723 | | | |
| 8723 | CHROME | Reel | 305 m |
| 8723 0601000 | CHROME | Reel | 1000 ft |
| 8723 | | | |
| 8723 | CHROME | Reel | 30 m |

| | | | |
|---------------|--------|--------|----------|
| 8723 060100 | CHROME | Reel | 100 ft |
| 8723 | | | |
| 8723 06015000 | CHROME | Reel | 15000 ft |
| 8723 | | | |
| 8723 | CHROME | Reel | 500 m |
| 8723 0601640 | CHROME | Reel | 1640 ft |
| 8723 | | | |
| 8723 | CHROME | Reel | 610 m |
| 8723 0602000 | CHROME | Reel | 2000 ft |
| 8723 | | | |
| 8723 | CHROME | Reel | 1000 m |
| 8723 0603280 | CHROME | Reel | 3280 ft |
| 8723 | | | |
| 8723 | CHROME | Reel | 1524 m |
| 8723 0605000 | CHROME | Reel | 5000 ft |
| 8723 | | | |
| 8723 | CHROME | Reel | 152 m |
| 8723 060500 | CHROME | Reel | 500 ft |
| 8723 | | | |
| 8723 0609999 | CHROME | Reel | 10000 ft |
| 8723 | | | |
| 8723 | CHROME | UnReel | 305 m |
| 8723 060U1000 | CHROME | UnReel | 1000 ft |
| 8723 | | | |
| 8723 060U2000 | CHROME | Reel | 2000 ft |
| 8723 | | | |
| 8723 | CHROME | UnReel | 152 m |
| 8723 060U500 | CHROME | UnReel | 500 ft |
| 8723 | CHROME | Reel | 1000 m |
| 8723 | CHROME | Reel | 30 m |
| 8723.00U152 | CHROME | UnReel | 152 m |
| 8723.00U305 | CHROME | UnReel | 305 m |
| 8723 | CHROME | Reel | 1524 m |
| 8723.01152 | CHROME | Reel | 152 m |
| 8723 | CHROME | Reel | 3048 m |
| 8723 | CHROME | Reel | 3050 m |

| | | | |
|------------|--------|------|-------|
| 8723.01305 | CHROME | Reel | 305 m |
| 8723 | CHROME | Reel | 610 m |
| 8723 | CHROME | Reel | 500 m |
| 8723 | CHROME | Reel | 500 m |
| 8723 | CHROME | Reel | 305 m |
| 8723 | | | |

© 2017 Belden, Inc

All Rights Reserved.

Although Belden makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice, and the listing of such information and specifications does not ensure product availability.

Belden provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Belden be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Belden has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

All sales of Belden products are subject to Belden's standard terms and conditions of sale.

Belden believes this product to be in compliance with EU RoHS (Directive 2002/95/EC, 27-Jan-2003). Material manufactured prior to the compliance date may be in stock at Belden facilities and in our Distributor's inventory. The information provided in this Product Disclosure, and the identification of materials listed as reportable or restricted within the Product Disclosure, is correct to the best of Belden's knowledge, information, and belief at the date of its publication. The information provided in this Product Disclosure is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. This Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.

Belden declares this product to be in compliance with EU LVD (Low Voltage Directive 73/23/EEC), as amended by directive 93/68/EEC.